



W1-ST1-B6

In-Line WAN TAP

Designed for offering the most complete and cost effective measurement solution for the Field Service Engineer:

STM-1 BNC TAP

W1-ST1-B6

The STM1 TAP is an electrical passive "In-Line" TAP. Unlike competitors' our products comply in any field condition.

The „no package loss“ and redundant power-feature makes it ideal for security applications.

Redundant power option guarantees a maximum monitoring uptime.

Transparent to the network, it shows traffic in real-time and copies all 7 layers.

The network link is permanently wired and tapped by high impedance circuitry.

The permanent link feature guarantees network connectivity, without package loss, also at power failure.

The unit is powered and one LED show the presence of power.

Advantage over "non-powered" Taps

Non-powered Taps are intrusive and steal power from your network and they can bring down your network.

Advantage over Taps without transformers

Transformers create a galvanic separation. Ground Potential Difference between Tap and network ports do not cause a problem as with "transformer-less" Taps.

Our Tap is powered and use transformers giving the best of both solutions.

Up to 3 units fit in a 1U 19 inch Rack Plate.




- *non intrusive In-Line Monitoring*
- *permanent Network Link guaranteed*
- *bypass data on power failure*
- *monitoring for all Protocol Levels*
- *no Package Loss*
- *Indicator for Power*
- *galvanic separation for maximum protection*
- *rackmount*
- *redundant power option*

general application:

Frontside :

LINE IN (TX+ RX)
LINE OUT (TX + RX)
MONITOR OUT (TX+RX)

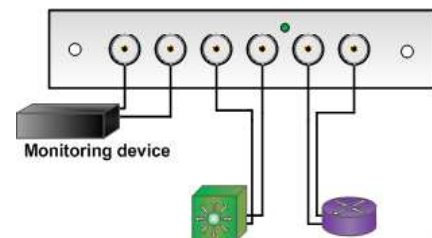

Specification, Weight & Size:

metal housing, structured black oven painted
6x BNC

Powered by external Adapter : 90-240V/12V (included)

Powerconsumption appr. 100mA

Operating Temperature : 0°C to 50°C

Storage Temperature : -10°C to 80°C

Humidity : 10% to 90%, none condensing

Main unit 14,2x8,3x3 cm (WxDxH), 260 gr.

Frontpanel Dimension 14,2x3cm (WxH)

optional Accessoires

- extra external Power Supply (Redundancy) (APWR2)
- 19" Rack Plate 1U (ARP1U-1M)
- Filling Plate (AFP1U)

for customer/sales/support worldwide contact:



+49 (0) 69 936 23 897
+49 (0) 69 3640 8925

sales@profitap.com www.profitap.com

your local partner: